



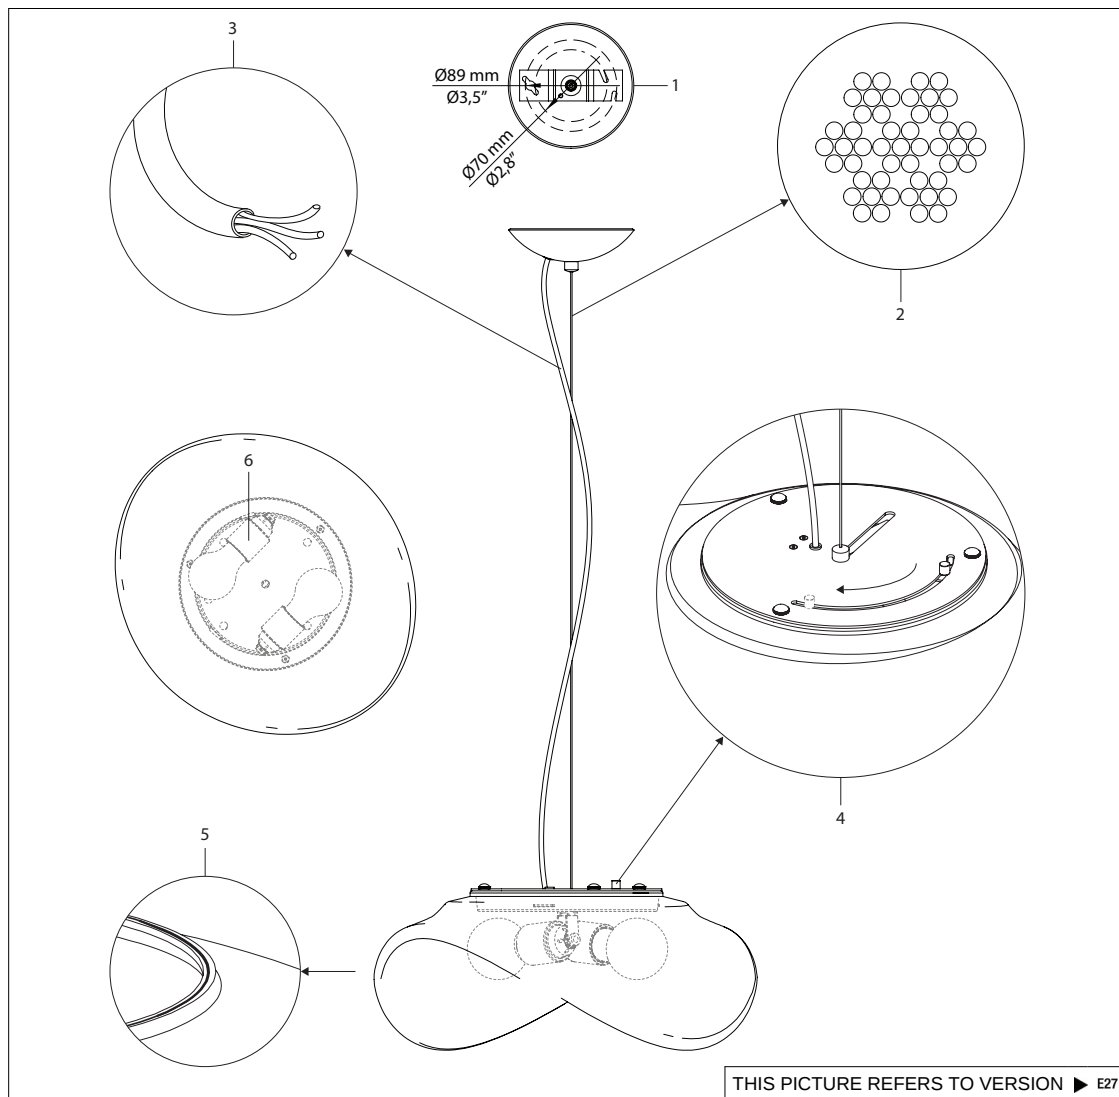

- 1**
Metal canopy with ceiling bracket with their shares of distance between holes in the ceiling.
- 2**
Stainless steel rope crease resistant of Ø1,2 mm compound of 7x7 wires.
- 3**
3-lines silicone electric wire, section of cables 3x0,75 T° 180.
- 4**
Frame made of iron with exclusive locking system of the glass Vistosi. Composed of a pin that directs 3 blades in contact with the inner surface of the glass locking it.
- 5**
Diffuser in satin crystal glass mouth blown and handmade. Glass composed in multilayer; crystal-white-crystal, color is not painted but got in the mix. Unleaded glass, minimum thickness of 4 mm.
- 6**
Metal lampholders T° 300 with connection type E27.

SHADE FINISHING



BC

FRAME FINISHING



NI

ELECTRIFICATION

► E27 2x77w 220-240V 50/60Hz

ALTERNATIVES:

LED 2x10w 220-240V 50/60 Hz

ELECTRIFICATION LED


LED G
20,5W DIM
3.000K

1x19,5w 220-240V 50/60Hz
LED 20,5W - 33 VOLT (DRIVER INCLUDED) -
3000K - 1850 LUMENS - DIMMABLE

LED J
17,5W DIM
3.000K

1x17,5w 220-240V 50/60Hz
LED 17,5W - 230 VOLT - 3000K - 1300 LUMENS -
DIMMABLE

SIZE



ALTERNATIVE VERSIONS

Click on the version to go to the web version of the product
24 D1, 24 D2, 24 GD1, GD2, G, MD1, MD2

MARKS:



VOLUME Mc 0,13
GROSS WEIGHT Kg 7
NET WEIGHT Kg 4,8



QR CODE

for download

2D drawing (DWG file)
3D design (EASM_IGES file)
Mounting instructions (PDF file)