




- 1**  
Metal canopy with a bracket on the ceiling and measures of the distances between holes.
- 2**  
3-lines silicone electric wire, section of cables 3x0,75 T° 180.
- 3**  
Stainless steel ropes crease resistant of Ø1,2 mm composed of 7x7 wires.
- 4**  
Diffuser in satin cristal glass blown and handmade. Unleaded glass of 4 mm minimum thickness, color is not painted but got into the mix.
- 5**  
5 plastic lampholders T° 250 with connection type E27.
- 6**  
Detail of the locking mechanism glass. Consisting of the use of a lever that directs turning it 5 arms outward in contact with the inner surface of the glass.

#### SHADE FINISHING

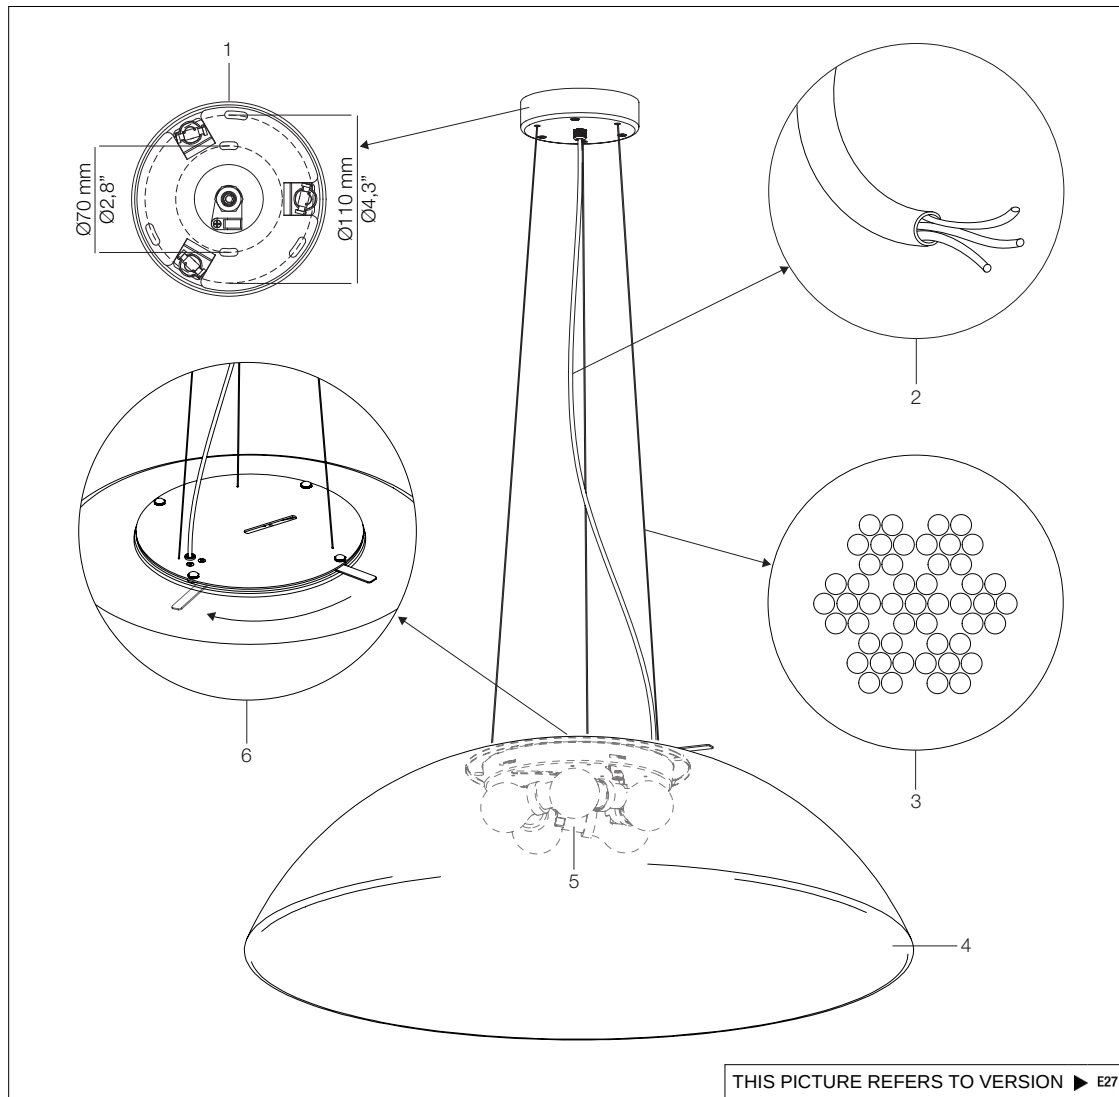

#### ELECTRIFICATION

► E27 5x77w 220-240V 50/60Hz

#### ALTERNATIVES:

LED 5x10w 220-240V 50/60 Hz

#### ELECTRIFICATION LED



1x17,5w 220-240V 50/60Hz LED 17,5W - 230 VOLT - 3000K - 1300 LUMENS - DIMMABLE

1x19,5w 220-240V 50/60Hz LED 20,5W - 33 VOLT (DRIVER INCLUDED) - 3000K - 1850 LUMENS - DIMMABLE


#### BC

#### FRAME FINISHING



#### BC

#### SIZE



#### ALTERNATIVE VERSIONS

Click on the version to go to the web version of the product

36 D1, 36 D2, 36, 53 D1, 53 D2, 53, 80 D1

#### MARKS:



VOLUME Mc 0,47  
GROSS WEIGHT Kg 23  
NET WEIGHT Kg 18

#### QR CODE

#### for download

2D drawing (DWG file)  
3D design (EASM\_IGES file)  
Mounting instructions (PDF file)

