




- 1**
Metal canopy with a bracket on the ceiling and measures of the distances between holes. Another canopy for decentralization.
- 2**
3-lines silicone electric wire, section of cables 3x0,75 T° 180.
- 3**
Stainless steel ropes crease resistant of Ø1,2 mm composed of 7x7 wires.
- 4**
Diffuser in satin cristal glass blown and handmade. Unleaded glass of 4 mm minimum thickness, color is not painted but got into the mix.
- 5**
5 plastic lampholders T° 250 with connection type E27.
- 6**
Detail of the locking mechanism glass. Consisting of the use of a lever that directs turning it 5 arms outward in contact with the inner surface of the glass.

SHADE FINISHING

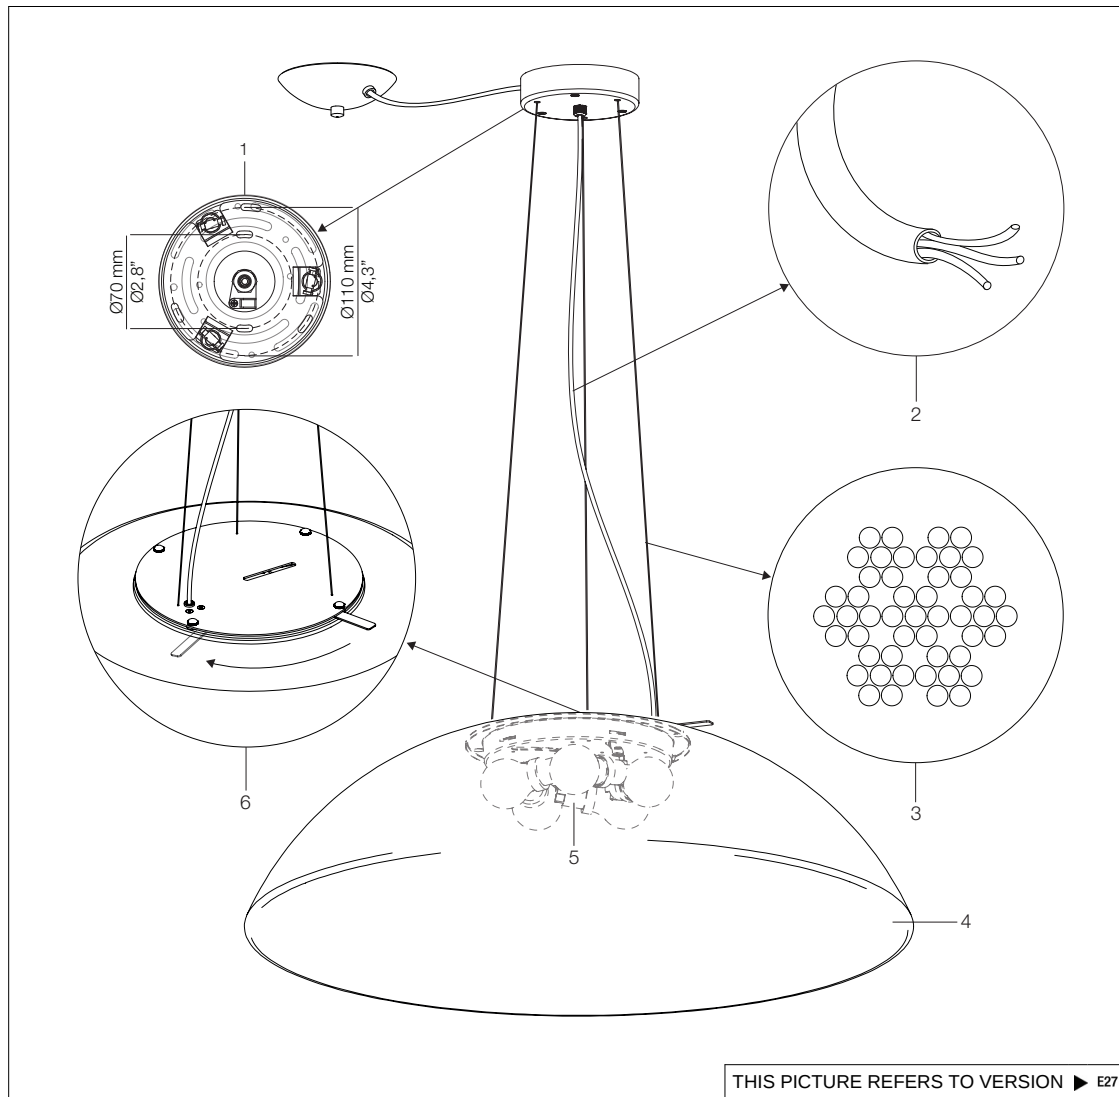

ELECTRIFICATION

► E27 5x77w 220-240V 50/60 Hz

ALTERNATIVES:

LED 5x10w 220-240V 50/60 Hz

ELECTRIFICATION LED



1x17,5w 220-240V 50/60 Hz LED 17,5W - 230 VOLT - 3000K - 1300 LUMENS - DIMMABLE

1x19,5w 220-240V 50/60 Hz LED 20,5W - 33 VOLT (DRIVER INCLUDED) - 3000K - 1850 LUMENS - DIMMABLE


BC

FRAME FINISHING



BC

SIZE



ALTERNATIVE VERSIONS

Click on the version to go to the web version of the product

36 D1, 36 D2, 36, 53 D1, 53 D2, 53, 80

MARKS:



VOLUME	Mc 0,47
GROSS WEIGHT	Kg 23
NET WEIGHT	Kg 18



QR CODE

for download

2D drawing (DWG file)
3D design (EASM_IGES file)
Mounting instructions (PDF file)