


Last information update: July 2022

Product configuration: BX59

BX59: Recessed rectangular ceiling-mounted IP68 luminaire, compact body, Warm White LEDs, Spot optic.



Product code

BX59: Recessed rectangular ceiling-mounted IP68 luminaire, compact body, Warm White LEDs, Spot optic.

Technical description

Miniaturised recessed rectangular luminaire with five optical elements with Warm White LED light sources - fixed Spot optic. Comprises a (round) optical compartment, frame, glass, outgoing cable and installation accessories to be ordered separately, where necessary. The optical compartment and frame are made of aluminium alloy and subjected to a multi-step pre-treatment process, the main phases of which include degreasing, fluorozirconic coating (a surface protective coat) and sealing (silane-based nanostructured coat). The successive painting phase is completed using primer and liquid acrylic paint, baked at 150°C, guaranteeing excellent resistance to atmospheric agents and UV rays. The glass-holder frame has plastic end caps. Tempered soda-lime closing glass, transparent with black screen-printing on the edge, 3mm thickness, attached to the frame with silicone. Silicone seals are placed between the glass-holder frame and the optical compartment. High-definition optic made of metallic thermoplastic, integrated into the black anti-glare screen towards the rear. Grade 304 stainless steel supporting springs. Equipped with IP68 control gear with outgoing cable for connection. The optical compartment and control gear are connected through IP68 quick-fit connectors. All external screws are made of A2 stainless steel.

Installation

Recessed installation with protruding frame on 1-20mm-thick suspended ceilings. Recess opening on suspended ceiling, size 141x37. Recessed installation with flush frame on 12.5mm- or 15mm-thick suspended ceilings, through adapter frame to be ordered separately. Installation on concrete ceilings using an outer casing to be ordered separately (flush and protruding frame).

Colour

Black / White (47) | Grey / Black (74)

Weight (Kg)

0.63

Mounting

ceiling recessed

Wiring

Power supply unit inclusive of electronic control gear (220-240VAC 50/60Hz) with outgoing connection cable. IP68 connectors, to be ordered separately, are available for the electrical connections.

Notes

Versions with black painted frame, DALI or with Neutral White LEDs (Wide Flood optic) are available on request.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	825	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W system:	13.1	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Im source:	1100	Ballast losses [W]:	3.2
W source:	9.9	Lamp code:	LED
Luminous efficiency (Im/W, real value):	63	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	75	Ambient operating temperature range:	from -30°C to 50°C.
Beam angle [°]:	12°	Power factor:	See installation instructions
CRI (minimum):	90	Inrush current:	5 A / 50 µs
CRI (typical):	92	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
Colour temperature [K]:	3000	Overvoltage protection:	4kV Common mode & 4kV Differential mode
MacAdam Step:	3		

Polar

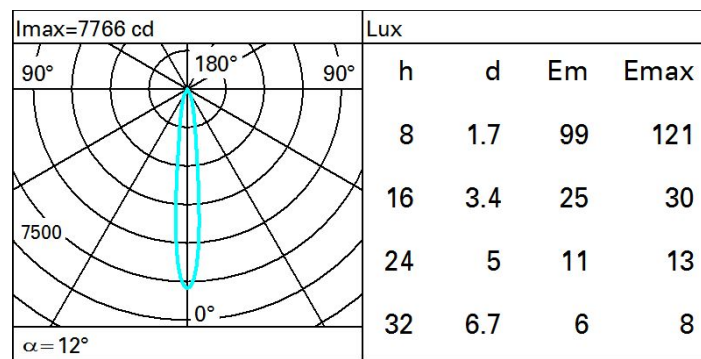

Isolux

