

ShowerTablet Bath thermostat 350 for exposed installation

Finish: **Chrome** Article Number: **13107000**



Description

product features

- projection 195 mm
- 2 functions
- will not run two functions at same time
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat cartridge, shut-off/ diverter valve
- maximum flow rate at 3 bar: 20 l/min
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 14 l/min
- Safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- material handles: metal
- surface shelf: aluminium anodized
- material cover: safety glass
- surface of the cover at color variant -000 = mirror glass, at color variant -400 = white glass
- connection dimension: DN15
- connection type: G 1/2
- centre distance: 150 ± 12 mm
- dirt filter included


Technology



Product image




Scale drawing

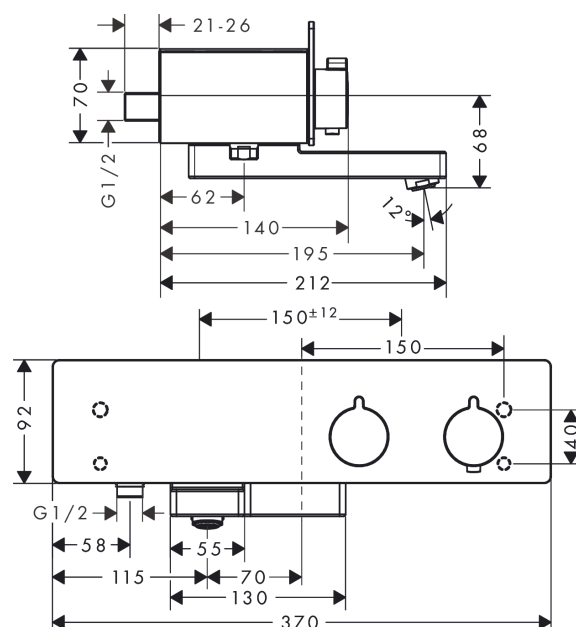

ShowerTablet Bath thermostat 350 for exposed installation Finish: **Chrome** Article Number: **13107000**



Flowchart

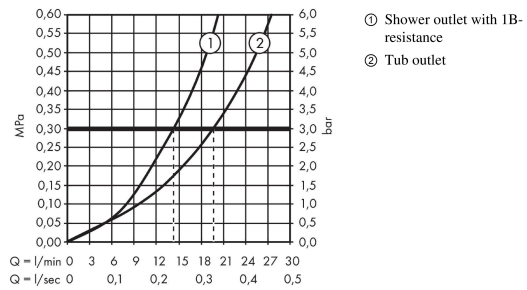


ShowerTablet
Bath thermostat 350 for exposed installation
 Finish: **Chrome** Article Number: **13107000**



Exploded Drawing

Year of production: **10/17 - 12/20**

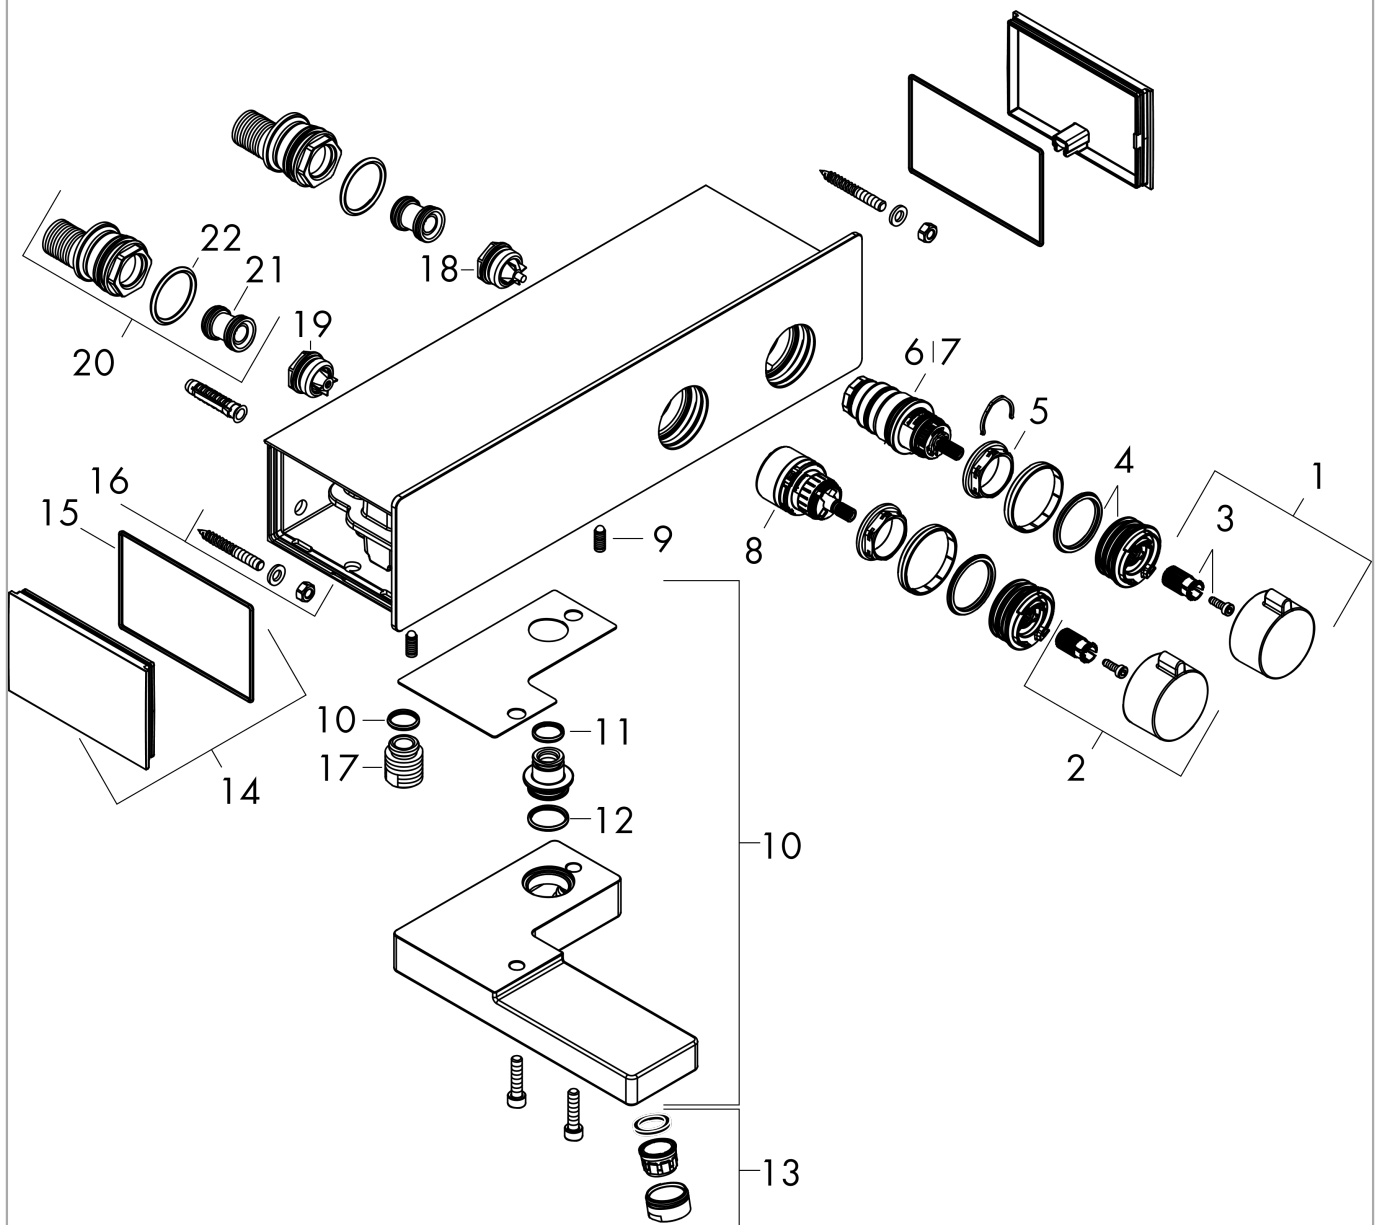

ShowerTablet
Bath thermostat 350 for exposed installation
 Finish: **Chrome** Article Number: **13107000**



Spare part list

Year of production: **10/17 - 12/20**

Pos.	Description	Article Number	PC	PU
1	handle	93227000	11	1
2	handle for shut off unit	93226000	10	1
3	handle fixing set	93228000	3	1
4	safety set	93229000	1	1
5	nut	98913000	6	1
6	thermostat cartridge	98282000	14	1
7	cartridge for exchanged connections	92373000	18	1
8	shut off unit with selector	98283000	12	1
9	hollow set screw M6x16 including o-ring 29x3	98372000	3	1
10	spout cpl.	93233000	17	1
11	O-ring 14x2	98129000	1	1
12	O-ring 19x2	98426000	1	1
13	aerator M24x1 (30 l/min)	96512000	5	1
14	cover	93225000	7	1
15	O-ring 76x2,5	98431000	2	1
16	mounting kit	98744000	10	1
17	connecting thread	95392000	6	1
18	non return valve with filter	93224000	7	1
19	non return valve (pressure-resistant up to 2 MPa)	93223000	8	1
20	set of S-unions	95772000	13	1
21	noise reduction	96429000	2	1
22	O-ring 29x3	98371000	2	1